



* REFER TO BEST PRACTICE TYPICAL ALLAN BLOCK DRAWING 1.0 FOR REINFORCED WALL APPLICATIONS AND ALL OTHER NOTES, DETAILS AND SPECIFICATIONS.

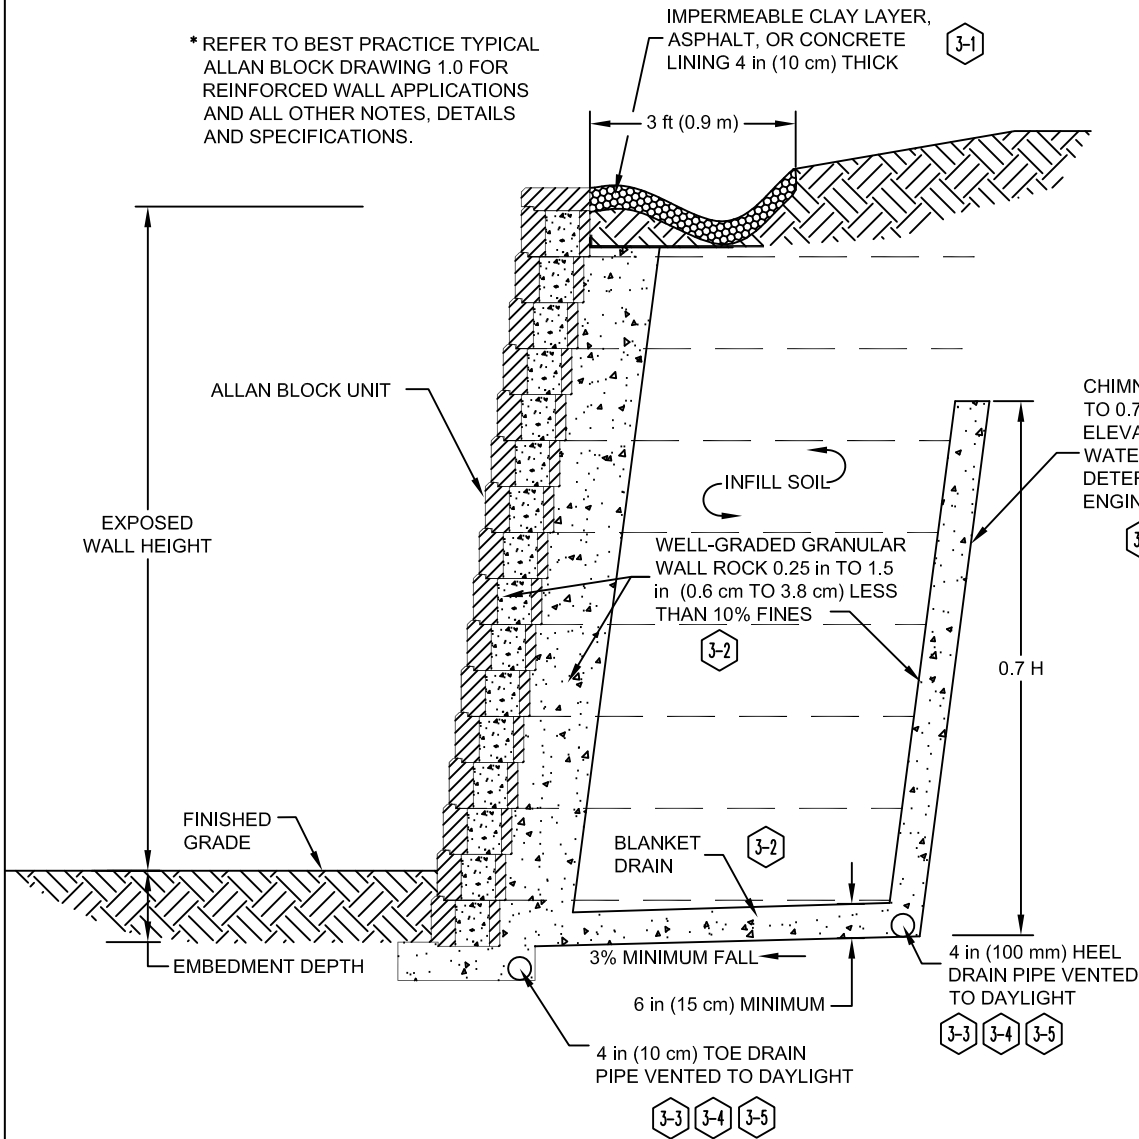

BEST PRACTICES NOTES:

- (3-1) BACKSLOPE SHOULD HAVE SWALES PLACED ABOVE SO WATER IS NOT ALLOWED TO FLOW OVER THE TOP OF THE WALL (CHAPTER 3.1)
- (3-2) BLANKET AND CHIMNEY DRAIN SHOULD BE USED IF MIGRATORY SUBSURFACE WATER IS SUSPECTED OR SOILS WITH POOR DRAINAGE (CHAPTER 3.2)
- (3-3) 4 in (10 cm) PERFORATED FLEXIBLE DRAIN PIPE OR RIGID PERFORATED DRAIN PIPE (CHAPTER 3.3)
- (3-4) ALL DRAIN PIPES MUST EXIT TO DAYLIGHT OR BE CONNECTED TO AN UNDERGROUND DRAINAGE SYSTEM. TO EXIT PIPE TO DAYLIGHT UTILIZE INFORMATION PROVIDED IN DRAWING 3 AND BEST PRACTICE DOCUMENT CHAPTER 4.0 FOR ALTERNATIVE DRAIN NOTES. (CHAPTER 3.3)
- (3-5) PIPE OUTLETS SHOULD BE PROTECTED FROM CRUSHING OR PLUGGING FROM OTHER MEANS (CHAPTER 3.3)

*** SEE BEST PRACTICES DOCUMENT CHAPTER 3.0 FOR MORE TYPICAL NOTES**

Designed By: KAH	Title: BEST PRACTICES WATER MANAGEMENT - TYPICAL	Date: 04/29/2014
Checked By: RJL	 This drawing should not be used for final design or construction without the certification of a professional engineer registered in the state in which the wall will be built. The accuracy and use of details contained in this document are the sole responsibility of the user. The user must verify each detail for accuracy as they pertain to their particular project. © 2005 Allan Block	Project No: I099.14
Scale: NOT TO SCALE		Drawing No: 2